




BAYOU LACASSINE

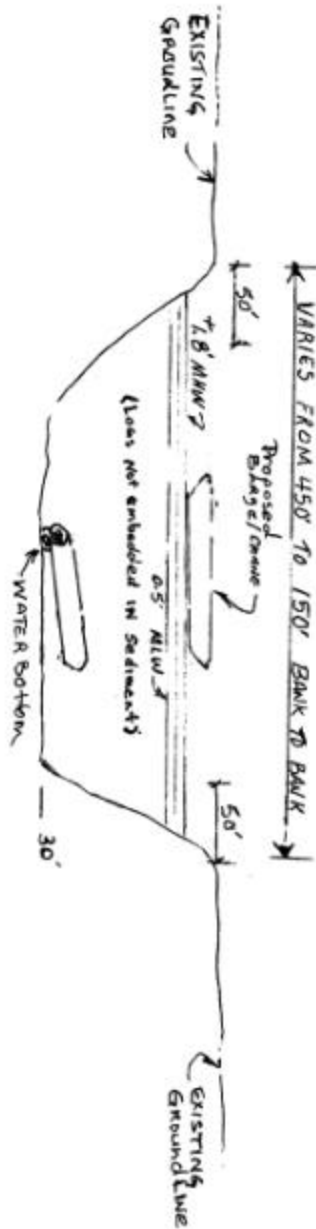

TYPICAL SECTION SINKER LOG EXTRACTION

NOTE:

Project area to be logged runs from Lorraine Bridge to LA Hwy 14. No stockpiling logs will be allowed on Lacassine Bayou. A minimum of 50 feet from the bank edge and a minimum of 8 feet water depth will be maintained at all times. No logs will be retrieved below water depth of 30 feet.

No dredging required

PROCEDURE OF SINKER LOG EXTRACTION

1. Submerged log to be found using a side scan sonar and a gps locator to mark coordinates of logs to be removed. (side scan and gps already done).
2. A diver is used to examine log and to make sure log is not buried in sediment. Next the diver fastens a lag screw with a cable attached to top of log. (only logs not buried will be removed as to minimize sediment disturbance).
3. A spud barge with a crane will now be used to remove logs by attaching crane to cable attached to log and lifting them onto barge where they will be transported and unloaded at our barge facilities. Existing barge unloading facilities are located at 335 river road Lowry La. 70549. Logs will be stored at this facility until such time as they can be transported to saw mill.